

Technical data sheet for

# FAST FRI TWIN PAN ELECTRIC FRYER 450mm

FN8224E



- 17kW high performance twin pan fryer
- Easy clean stainless steel open pan with 10 year limited warranty
- 12L per pan oil capacity
- 25mm (1") drain valves
- Stainless steel exterior
- Easy service
- Fully modular
- Low back model (FNL) available

## Overall Construction

- Stainless steel pan with 10 year limited warranty
- Bull nose welded 1.5mm 304 stainless steel
- Splashback 1.5mm 304 stainless steel
- Side panels 1.2mm 304 stainless steel
- Double skin door with 0.9mm 304 stainless exterior
- Hinge out counterbalanced heating elements
- 25mm (1") drain valves
- 150mm legs in 63mm dia. heavy-duty 1.2mm 304 stainless steel with adjustable feet
- 2 baskets and stainless steel lid supplied standard

## Controls

- Mechanical thermostats
- Thermostat range 90-200°C
- Large easy use controls with easy view scale
- Fail-safe over-temperature safety cut-outs
- Element tilt switch for heating cut-out on element lift
- Indicator lights for power and heating (per pan)

## Cleaning and Servicing

- Open stainless steel pans for easy clean
- Easy clean basket support bar
- 25mm (1") drain valves for effective draining
- Easy clean stainless steel exterior
- Access to all parts from front of unit

Technical data sheet for  
**FAST FRI TWIN PAN  
 ELECTRIC FRYER 450mm**



**Specifications**

**Production rate**

31kg/hr

**Pan Size (per pan)**

Oil capacity 12L (24lbs shortening) per pan

Width 175mm

Length 380mm

Oil frying depth 95mm

**Baskets**

2 chrome plated wire baskets

140mm W x 335mm D x 145mm H

**Elements (per pan)**

3 x 2.83kW stainless steel heating elements

**Electrical requirements**

17kW, 400-415Vac, 50/60hz, 3P+N+E

L1 23.6A

L2 23.6A

L3 23.6A

**Electrical connection**

62mm from RH side, 365mm from rear,  
 and 440mm from floor

**DIMENSIONS**

Width 450mm

Depth 805mm

Height 915mm

Incl. splashback 1130mm

Incl. low back 1085mm

**NETT WEIGHT**

74kg

**PACKING DATA**

0.54m<sup>3</sup>, 116kg

Width 870mm

Depth 495mm

Height 1255mm

**OPTIONS AT EXTRA COST**

Waldorf Filtamax filtration system

Extra baskets




Side splash guards

Joining caps

Castors

Plinth mounting

FN8224E

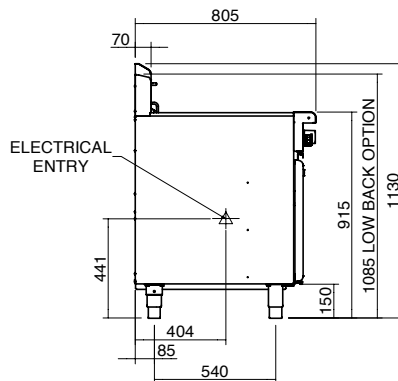

Australia  
[www.moffat.com.au](http://www.moffat.com.au)  
 New Zealand  
[www.moffat.co.nz](http://www.moffat.co.nz)

Australia  
 Moffat Pty Limited

Victoria/Tasmania  
 740 Springvale Road  
 Mulgrave, Victoria 3170  
 Telephone 03-9518 3888  
 Facsimile 03-9518 3833  
[vsales@moffat.com.au](mailto:vsales@moffat.com.au)

New South Wales  
 Telephone 02-8833 4111  
[nswsales@moffat.com.au](mailto:nswsales@moffat.com.au)

South Australia  
 Telephone 03-9518 3888  
[vsales@moffat.com.au](mailto:vsales@moffat.com.au)

Queensland  
 Telephone 07-3630 8600  
[qldsales@moffat.com.au](mailto:qldsales@moffat.com.au)

Western Australia  
 Telephone 08-9202 6820  
[bgarcia@moffat.com.au](mailto:bgarcia@moffat.com.au)

New Zealand  
 Moffat Limited

Christchurch  
 Telephone 03-389 1007  
[sales@moffat.co.nz](mailto:sales@moffat.co.nz)

Auckland  
 Telephone 09-574 3150  
[sales@moffat.co.nz](mailto:sales@moffat.co.nz)



Designed and manufactured by



ISO9001  
 All Waldorf products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

